


Pneumatic Crimping Applicator


RSA-JNA-20E

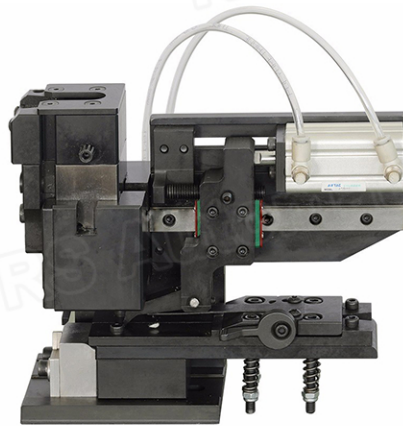

7 DAYS
lead time


Feature

- ▶ Adjustment : C.H. / I.H. Adjustment Accuracy 0.02mm, Adjustment Range 2.0mm, which show strong adjustment feeling and make sure easier operation.



0.02mm/step

The crimp height $\pm 0.2\text{mm}$ for each step of the adjusting screw.



The crimp height $\pm 0.2\text{mm}$ for each movement of the pointer.

- ▶ Modularized framework: user-friendly and reduce the maintenance cost;
- ▶ Pneumatic feeding mechanism: 40mm terminal pitch and feeding speed is adjustable. Compact cylinder and guide cylinder to choose from, both can enable you to operate the machine freely;
- ▶ Reversing value structure: Bulid-in reversing value is stable and reliable;
- ▶ Quick change: Perfectly fit with ShinMaywa, JAM and KODERA semi-auto crimping machine;
- ▶ Technical documents: You can get a complete technical document containing all the information needed to safely use and correctly maintain the equipment. Upon request, a capability study & Cross-section Analysis could be provided;
- ▶ Strong resistance to rust: QW surface plating;
- ▶ Production tracking: Laser labeling for each part-unique ID.
- ▶ Surface treatment is optional.

Specification

Model	RSA-JNA-20E
Stroke	30mm
Feeding type	End Feed
Shut Height	119.7mm(4.713in)
Wire Size	0.08 ~ 6mm ² (9~28AWG)
Terminal Thickness	1.2mm (max)
Feeding System	Pneumatic
Terminal Pitch	40mm (max)
weight	5KG
Dimension	L225mm×W128mm×H100mm