



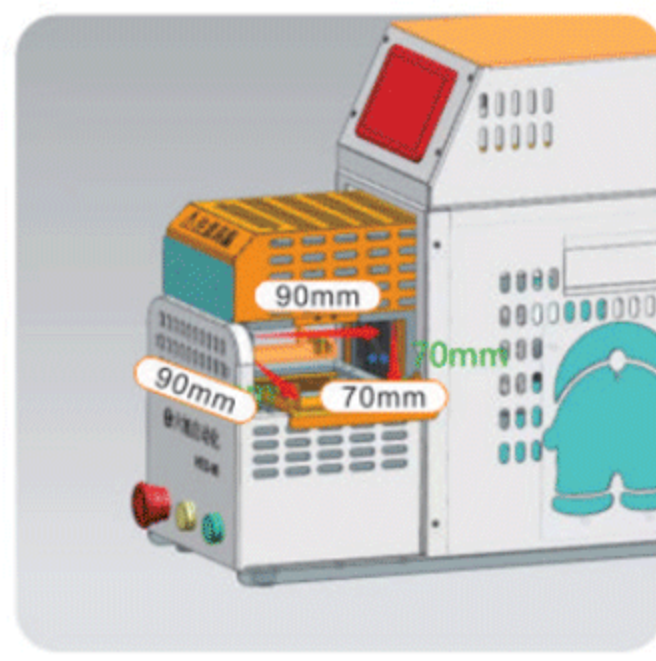


New Energy Harness Assembly Line Heat Shrinking Machine **RSM-HSM-06**

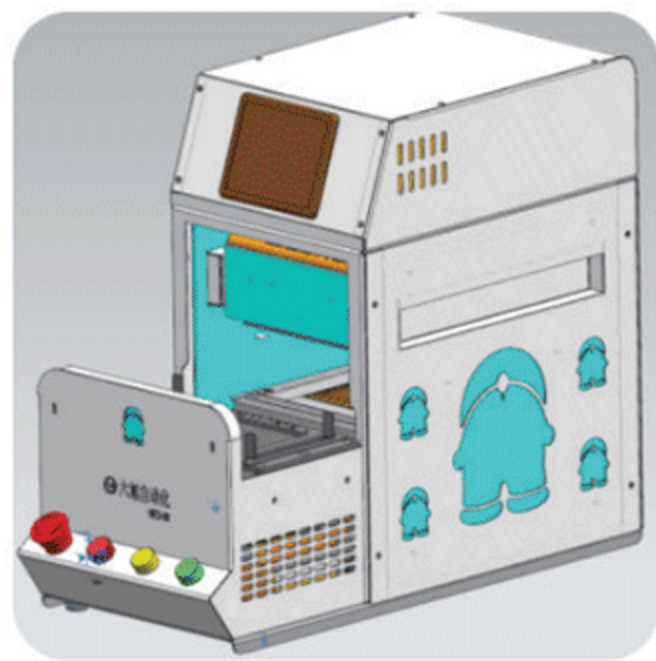

Feature

- ▶ Improved production efficiency. The machine can be embedded in new energy harness assembly line to reduce the waiting time.
- ▶ Precise temperature control with difference of $\pm 5^{\circ}\text{C}$ by unique vortex heat shrink chamber, prevent excessive glue overflow and guarantee the shrinking quality.

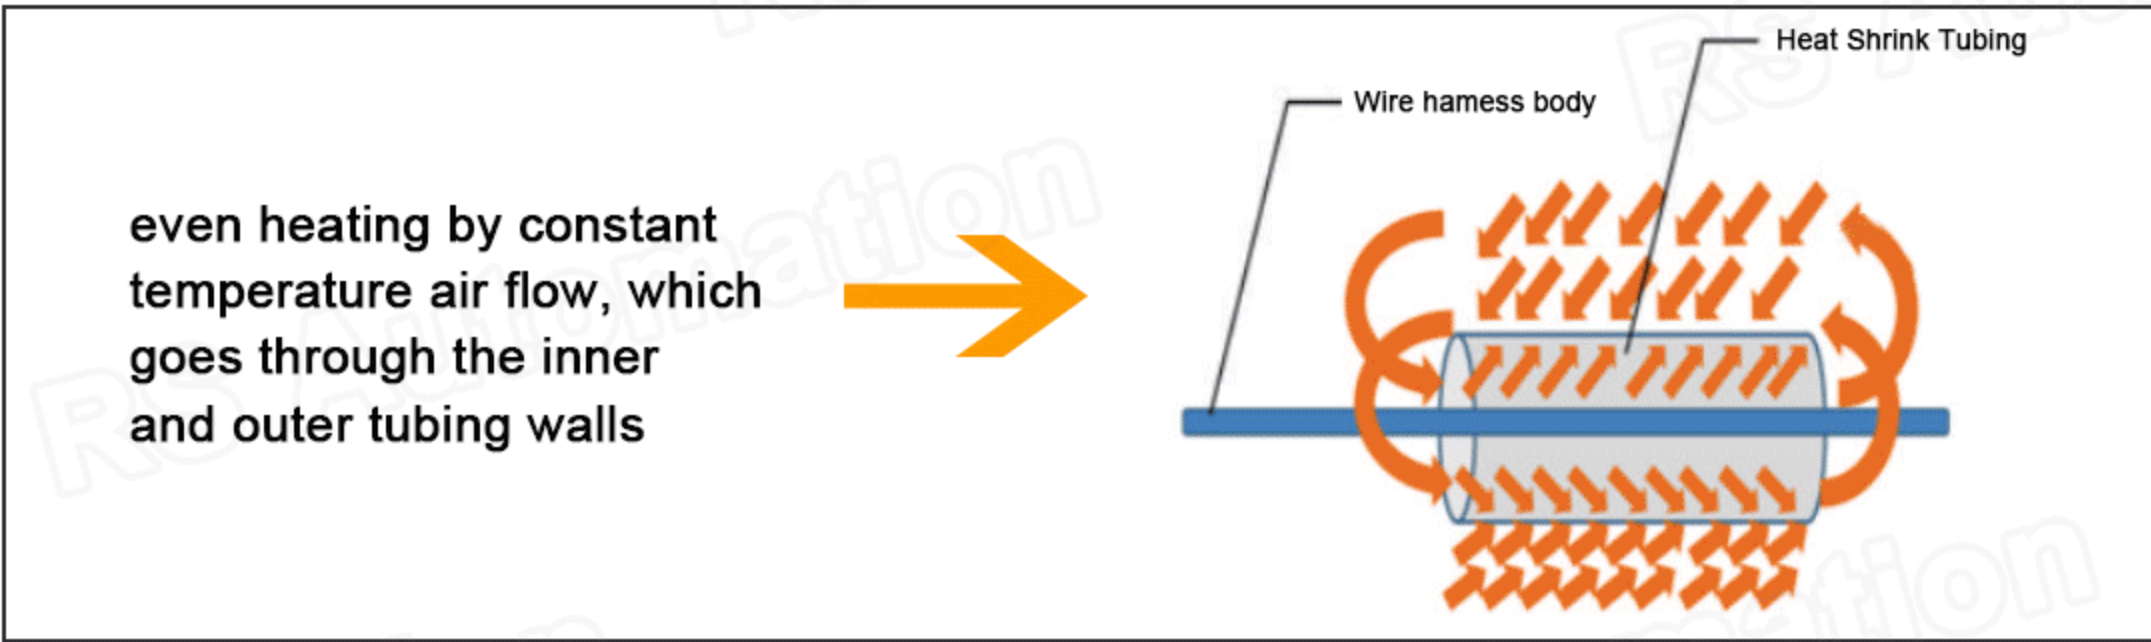

- ▶ High compatibility. Quick and convenient changeover with various clamp fixtures/jigs.
- ▶ Enhance process control by real-time monitored and adjustable temperature and heat shrink time to meet various production needs.
- ▶ Energy-saving. Keep-warm mode: the heating pipe stops working after the set temperature reaches, and then starts when temperature is out of range.
- ▶ Operation safety guaranteed. Unique heat insulation and heat dissipation system to hold the hot air flow inside, no burn operator.
- ▶ Visual inspection system/MES can be optional.

Specification

Model	RSM-HSM-06
Application	New energy harness assembly line
Working Mode	Automatic telescopic heating
Heating Method	Vortex hot air circulation
Temperature Control	PID control
Temperature Range	400°C (max.)
Working Area	L90mm*W90mm*H70mm
One-time Heating Quantity	According to different fixtures/wire harnesses samples
Productivity	2S-25S/PCS
Voltage	AC220V/50HZ
Current	6A
Power	1.3KW
Dimension	L600mm*W260mm*H500mm