


# Desktop Light Wave Heat Shrinking Machine

## RSM-HSM-J1802

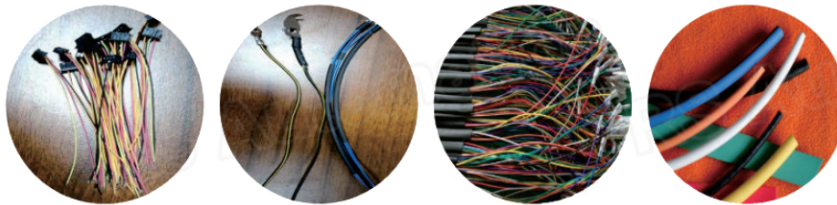

### Feature

- ▶ Light wave infrared heating, the heat shrink tube can be uniformly shrunk after rapid heating.
- ▶ With harness fixture, the position of heat shrink tubing can be adjusted/positioned, and the fixture can be easily replaced.
- ▶ User-friendly. With temperature sensor and time control sensor, user can adjust the heat shrink time at any time.
- ▶ Safe and reliable. The shrink chamber automatically closes after start, and automatically opens after the heat shrink time is up to prevent the operator from being burned.
- ▶ Compact and portable design for easier integration with other machines.

### Specification

Model	RSM-HSM-J1802
Applicable Tubing	≤10mm <sup>2</sup> (PVC, PET, double-wall adhesive heat shrink tubing)
Heating Method	Light wave
Temperature Range	0~600°C
Work Mode	Single station automatic closing heater
One-time Heating Quantity	According to different fixtures/wire harnesses samples
Productivity	7S-30S/PCS
Voltage	AC220V/50HZ
Current	15A
Dimension	L520mm*W490mm*H240mm