


HST Shrinking Machine

RSE-HST-02A

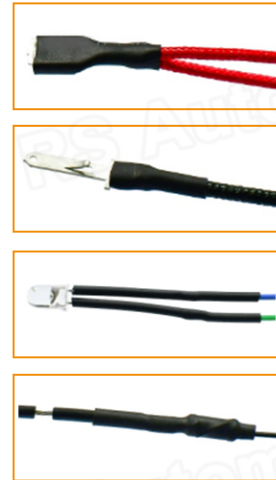

Feature

- ▶ 360 degree thermal cyclone to guarantee lower energy consumption, evenly heating and stable shrinking.
- ▶ Higher flexibility. There are two modes available for blowing: foot switch for manual blowing, and automatic blowing.
- ▶ The blowing time can be set to prevent insufficient or excessive blowing time, which can enhance yield rate.

Specification

Model	RSE-HST-02A
Tube O.D.	0.5-30mm (round/flat tube)
Tube Length	1-50mm
U-shaped Slot	30mm*50mm
Applicable Tube	Round/Flat tube /PP/PE/PVC/POF/Double-wall heat shrinkable tube
Productivity	1000-1400 pcs(According to tube length and tube O.D.)
Yield Rate	99%
Voltage	AC 220V 50/60Hz
Power	1.5KW
Air Source	0.4-0.6Mpa/ 450L/min
Weigh	8.8kg
Dimension	L420mm*W203mm*H270mm

Wearing Parts

- ▶ Heating rod (special for HST shrinking machine) 1500W (Replace if damaged)



1500W