


Pneumatic Crimping Applicator

RSM-JNA-20S



7 DAYS
lead time

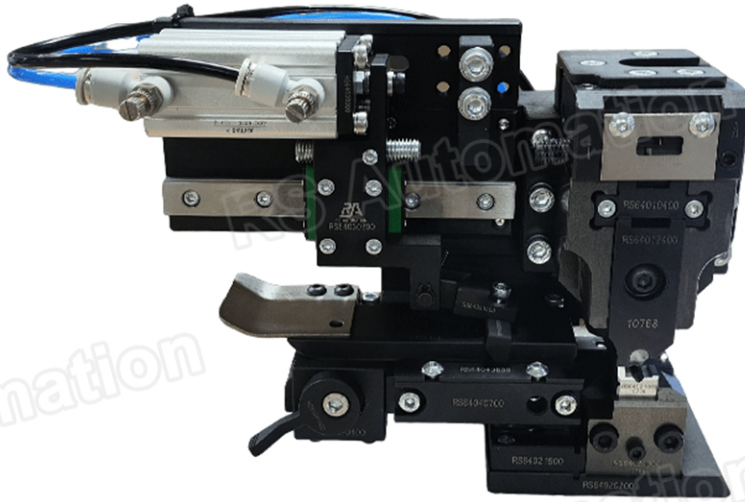

Feature

- ▶ Continuous crimping height adjustment provides a 0.02mm resolution for C.H./I.H. with a 2.0mm range, which meet every rigorous demand on the crimping.
- ▶ Modular framework to make adjustment and maintenance easier.
- ▶ Terminal pitch 40mm become true easily and feeding speed can be adjusted with facility.
- ▶ Save repeated invest. It can work for semi-automatic and fully automatic crimping machine for Komax, AMP, Mecal and so on.
- ▶ Each applicator delivered will be attached with a terminal cross section analysis report.
- ▶ Lower maintenance cost. Special surface treatment to ensure strong corrosion resistance.
- ▶ Each spare part has its own P/N number for easier maintenance.

Specification

Model	RSM-JNA-20S
Stroke	30mm
Feeding type	Side Feed
Shut Height	119.7mm
Wire Size	0.08 ~ 6mm ² (9~30AWG)
Terminal Thickness	Max.1mm
Feeding System	Pneumatic
Terminal Pitch	40mm
weight	5KG
Dimension	L193mm×W92mm×H147mm