


## Semi-automatic Rubber Grommet Insertion Machine

### RSC-GIM-2000

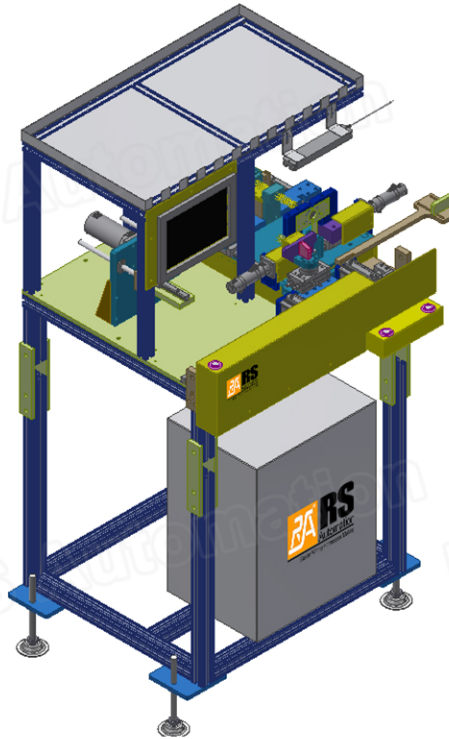

### Feature

- ▶ The fixture can control the insertion depth of the grommet, without manual positioning.
- ▶ The hollow needle protrudes from the grommet to facilitate operators to quickly locate holes and insert, which enhance operator comfort and reduce fatigue.
- ▶ The long threading needle can protect the multi-core cable from entangling with each other.
- ▶ Adopt servo motor, servo axis coordinate and speed can be easily and precisely adjusted on HMI to enhance productivity.
- ▶ Safety conscious. Safety cover is optional to protect operators from injury.

### Specification

| Model      | RSC-GIM-2000                                |
|------------|---------------------------------------------|
| Cycle Time | 40s (Insertion time depends on proficiency) |
| Voltage    | AC 220V/50Hz (single phase)                 |
| Power      | 1000W                                       |
| Air Source | 0.4MPa                                      |
| Weight     | 240kg                                       |
| Dimension  | L800mm*W750mm*H800mm                        |